

Quick Release Couplings (QRC)

END CONNECTION AVAILABLE

Socket weld, hose thread, hose shank, pipe thread, and flanged.

- Size** : 1/8" to 4"
- Pressure** : Upto 4000 psi.
- Temperature** : -25°C to 250°C.
- MOC** : MS, CS, Brass, SS 304, SS 316, SS316L.
- Seals** : Nitrile, Neoprene, Viton, Silicone, PTFE.

QRC With Single / Double Valve:

Coupler (Socket)



Adaptor (Plug)



Coupler & Adaptor Assembles



QRC Through Type:

Coupler (Socket)



Adaptor (Plug)



Coupler & Adaptor Assembles



Quick Camlock Couplings

END CONNECTION AVAILABLE

Socket weld, hose thread, hose shank, pipe thread, and flanged.

- Size** : 1/4" to 6"
- Pressure** : Upto 400 psi.
- Temperature** : -25°C to 250°C.
- MOC** : MS, CS, Brass, SS 304, SS 316, SS316L.
- Seals** : Nitrile, Neoprene, Viton, Silicone, PTFE.

Type A



Type B



Type C



Type D



Type E



Type F



Type DC



Type DP




Ground Joint Couplings

Size : 1/2" to 4"

MOC : CS Zinc plates, Stainless Steel or Brass.

Assembly with Hose Stem,
Wing Nut and Female Spud

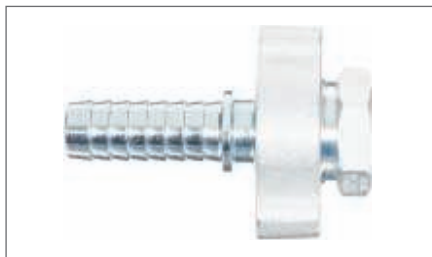

Hose Stem



Wing Nut



Female Spud



Male Stem



Chicago Claw Coupling

Size : 3/8" to 1"

MOC : Zinc plated Carbon Steel

